

FIG. 1

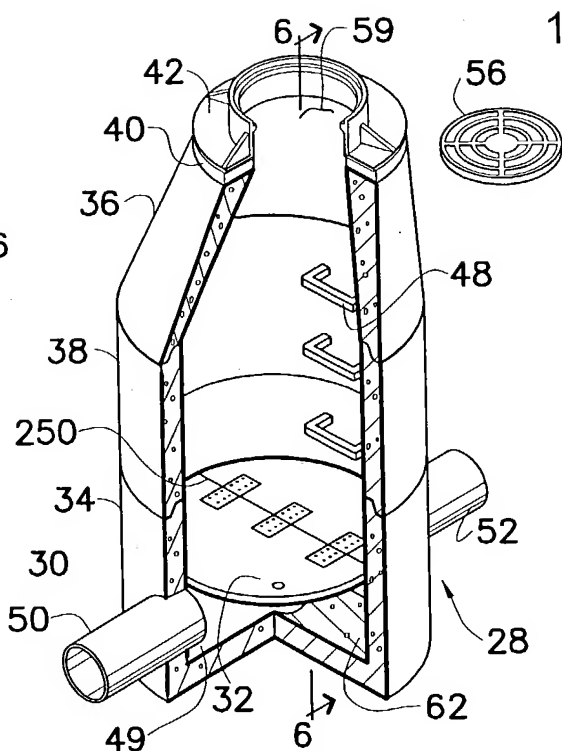


FIG. 2

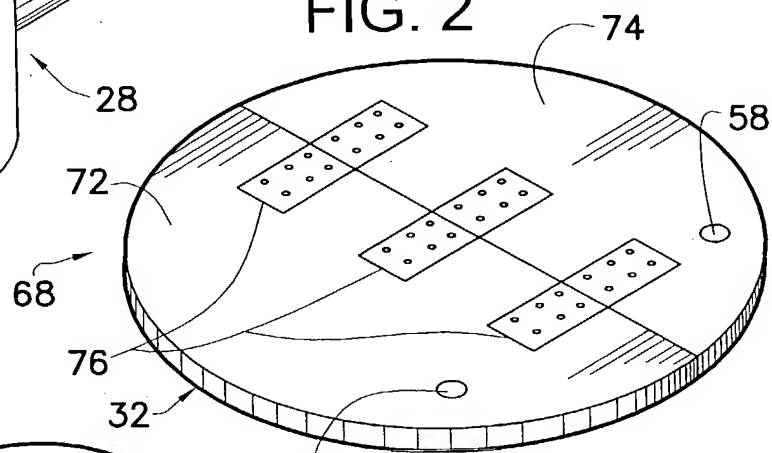


FIG. 3

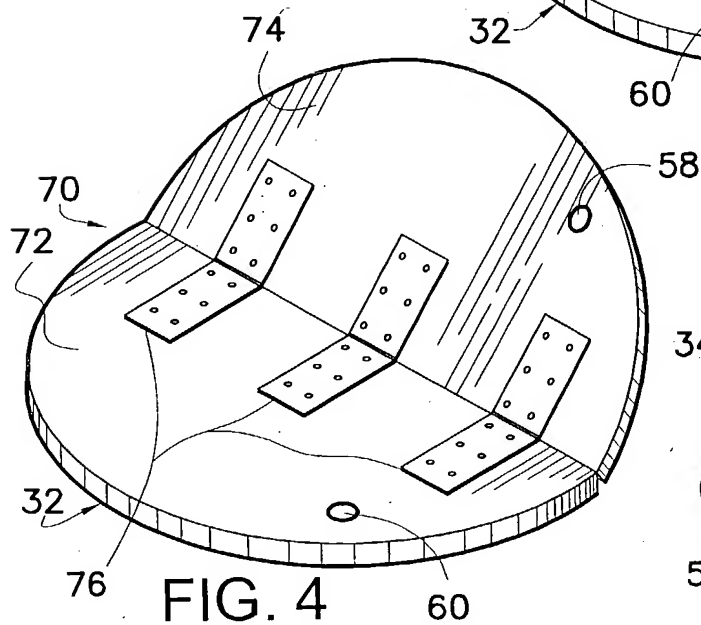


FIG. 4

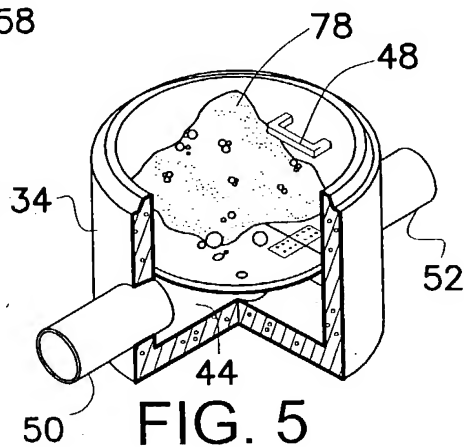


FIG. 5

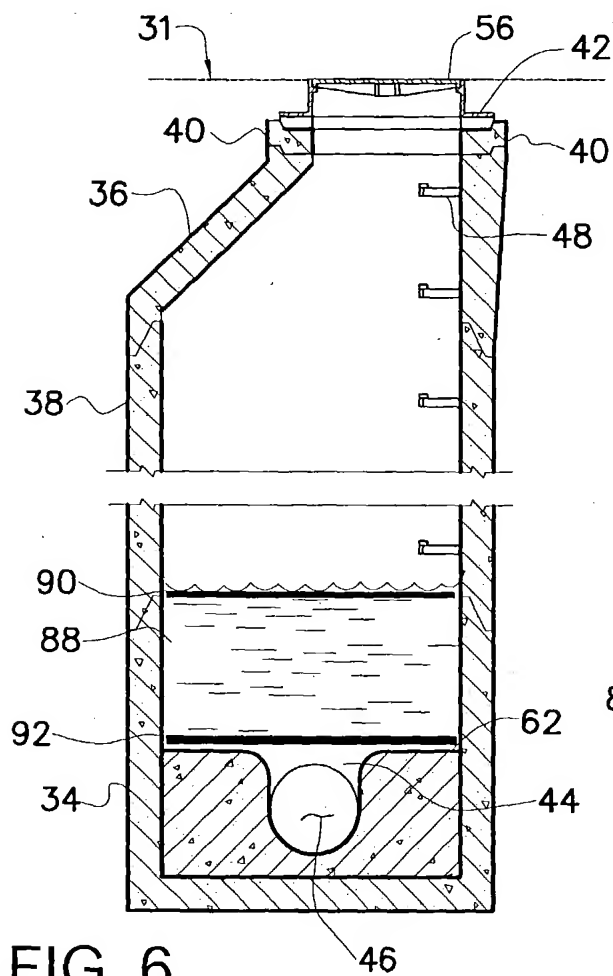


FIG. 6

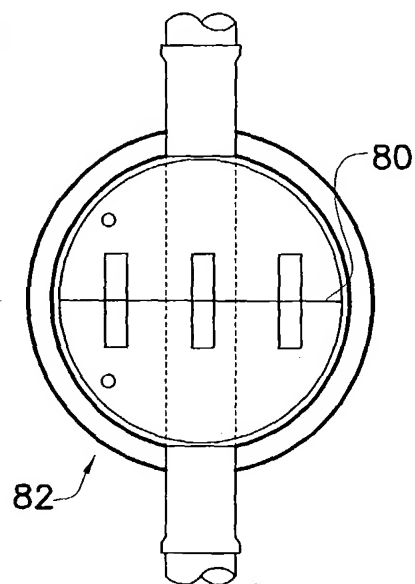


FIG. 7

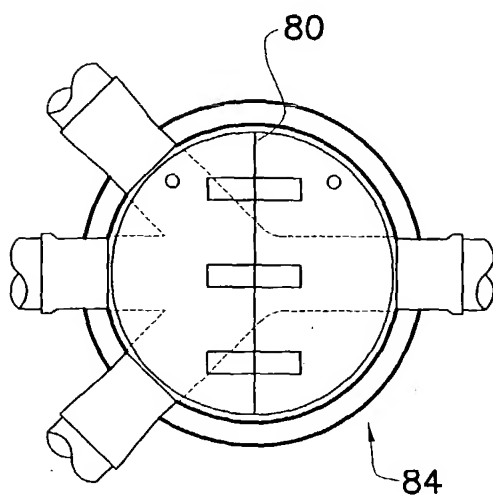


FIG. 8

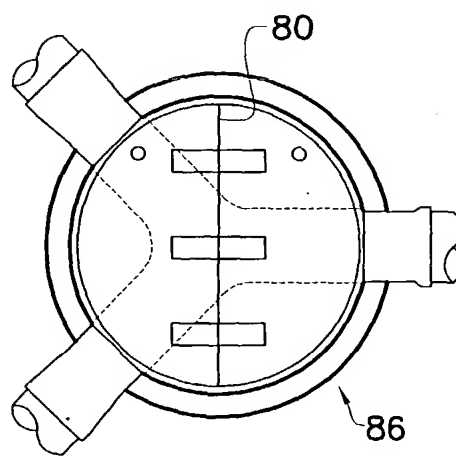


FIG. 9

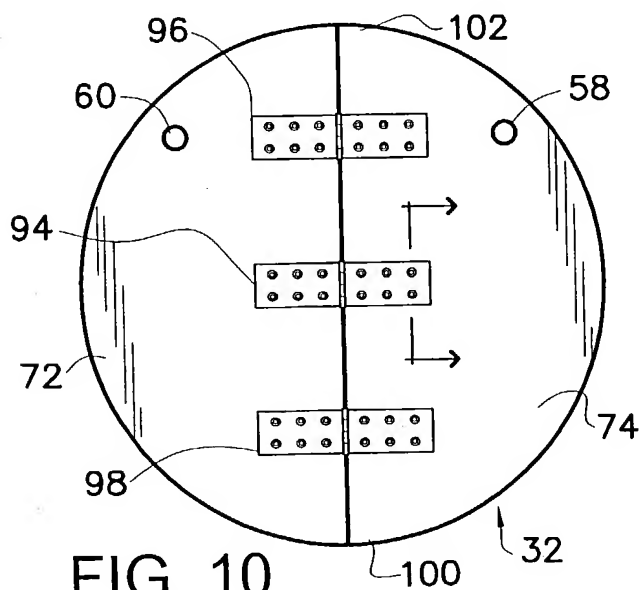


FIG. 10

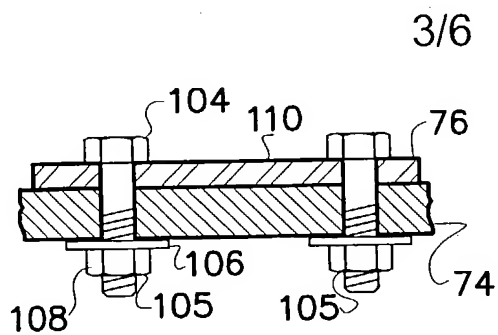


FIG. 11

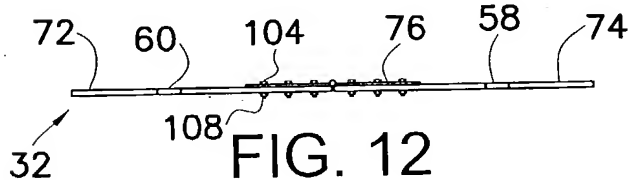


FIG. 12

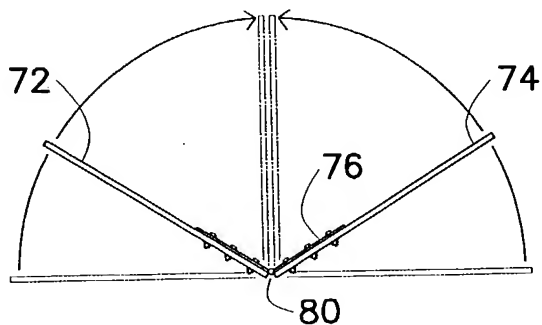


FIG. 13

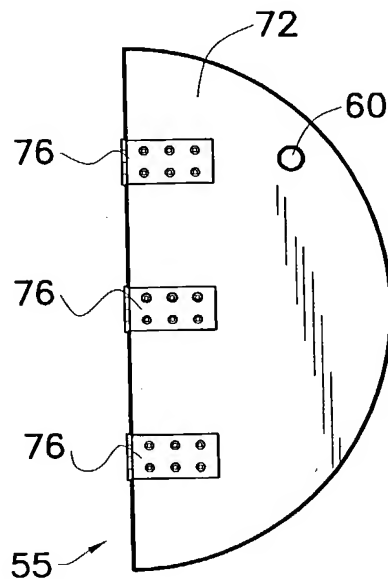


FIG. 14

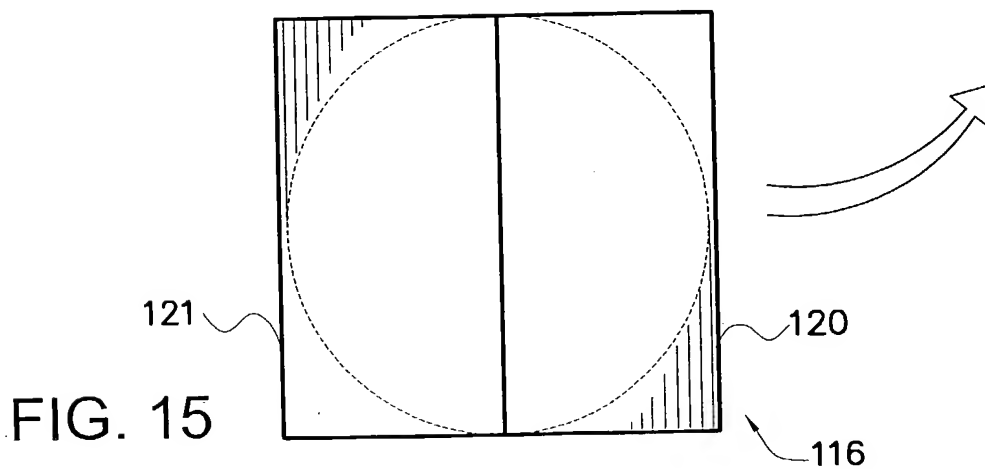


FIG. 15

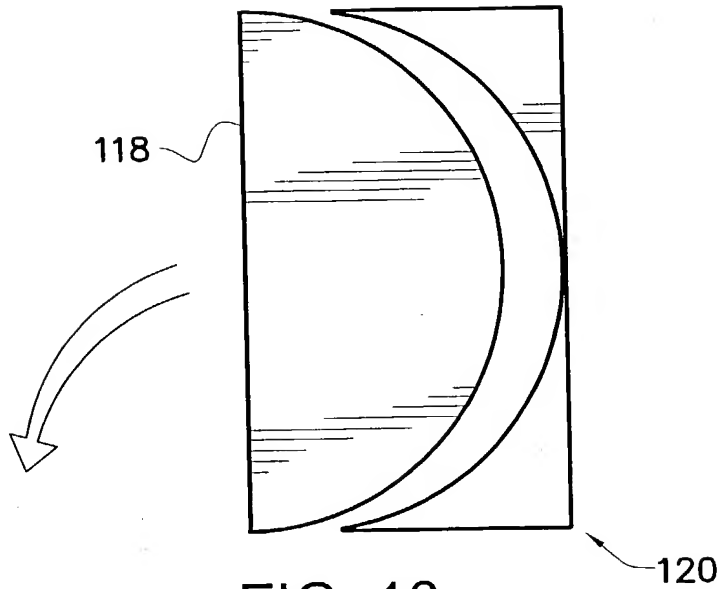


FIG. 16

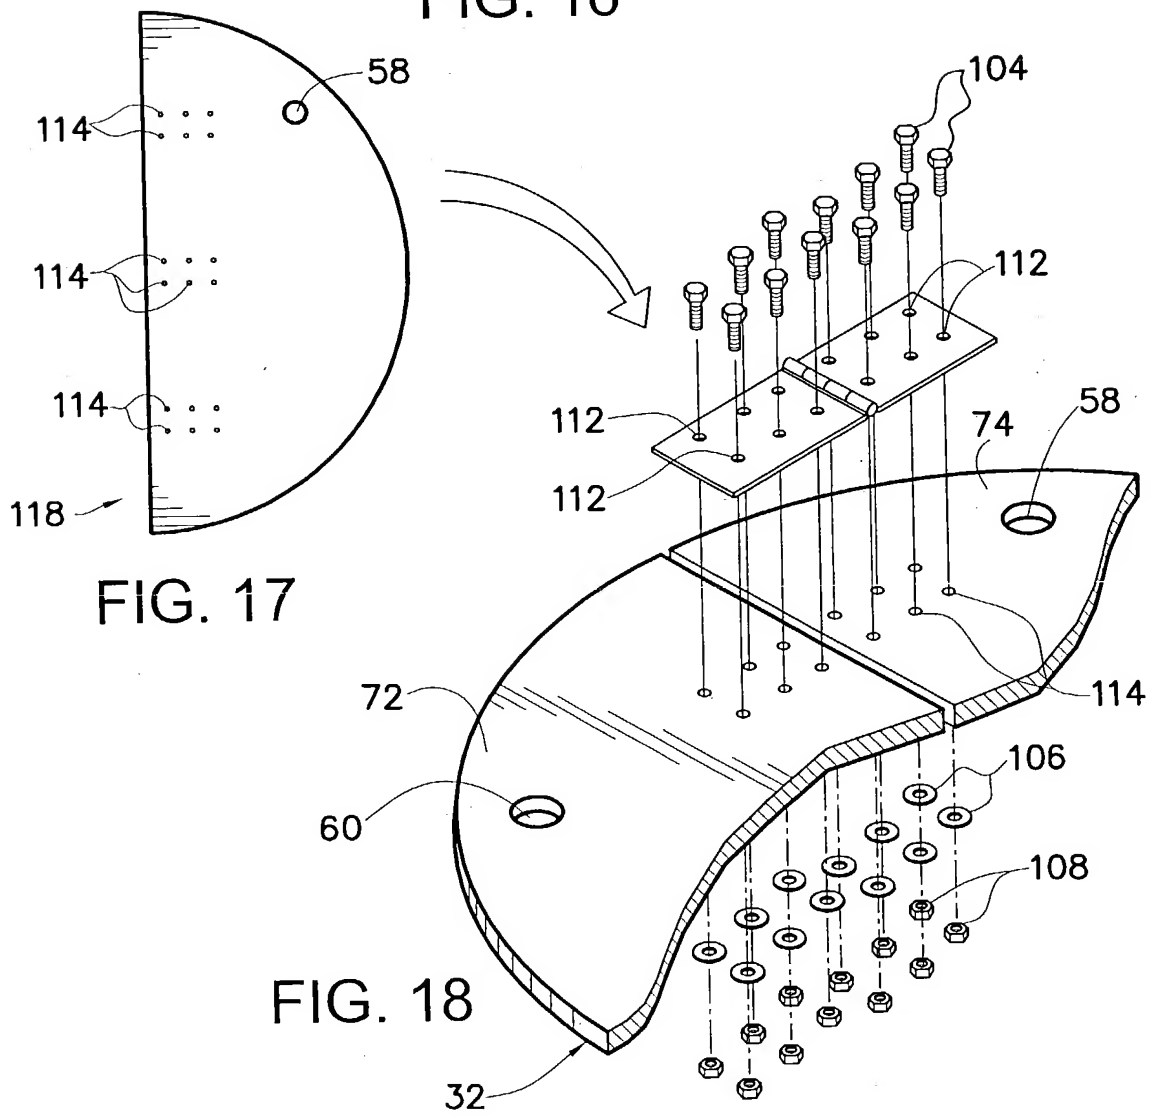


FIG. 17

FIG. 18

FIG. 1 is a perspective view of a ring-shaped component 206. The component 206 has a circular ring with a threaded portion 208. The threaded portion 208 is secured to a substrate (indicated by hatching) by a nut and washer assembly.

FIG. 22

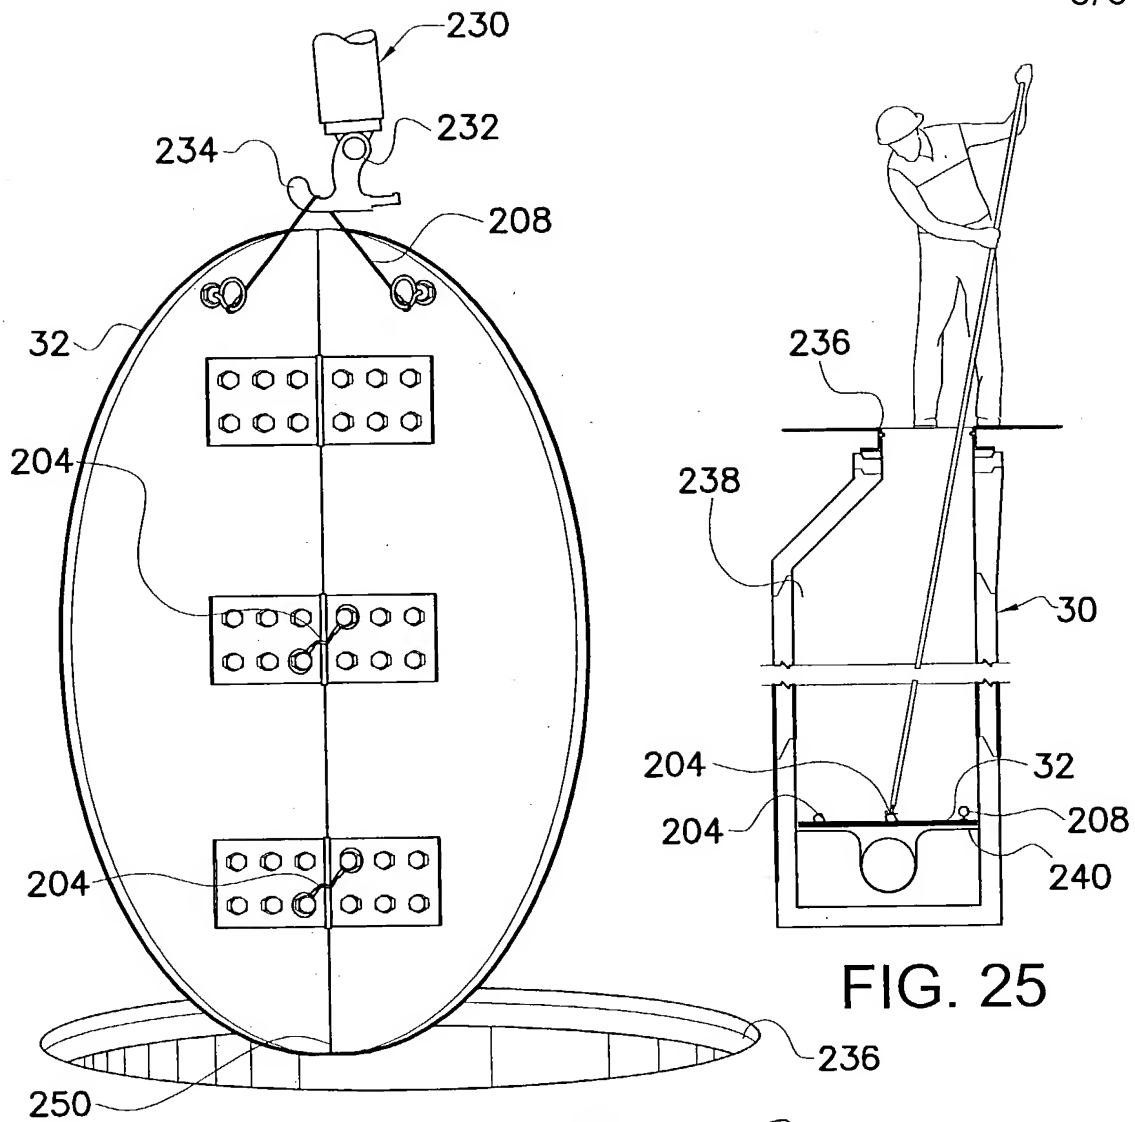


FIG. 25

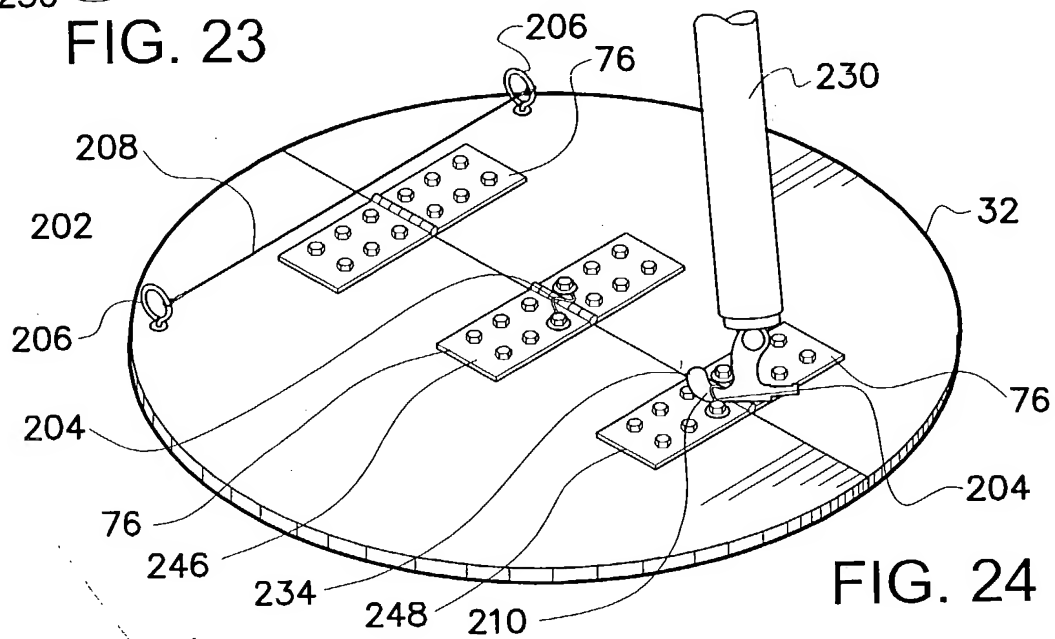


FIG. 24